

# CIRCUIT BREAKER FINDERS

AUTOMATICALLY FINDS BREAKERS AND FUSES ON 120V AC CIRCUITS

- cULus 1436 Listed
- Transmitter Triple Function - Signal Transmitter, Receptacle Tester & GFCI Trip Test (61-534 only)
- Receiver Dual Function - Breaker Finder and Non-Contact Voltage Tester (61-534 only)
- Includes transmitter, receiver and battery



**GFCI Trip**

Transmitter for #61-534

GFCI Trip

Wiring Indications

CORRECT WIRING

**Non-Contact Voltage Tester**

**LED Indicators**

**Audible Tone**

**61-534**

**Polarity & Live Circuit Indication**

Wiring Indications

- CORRECT WIRING
- OPEN CIRCUIT
- REV. POLARITY
- OPEN HOT
- OPEN NEUTRAL
- HOT & GND. REV.
- HOT ON NEUTRAL WITH HOT OPEN
- LAMP OUT
- CIRCUIT OK

**61-532**

**Live Circuit Indication**


Plug in Transmitter. Go to panel. Turn receiver on every room power. Slide nose down each breaker on both sides of panel. Note receiver beeps frequently while it measures. Receiver beeps on correct breaker.



Scan with your smartphone to learn more



**Lead Adapter Kit**  
Provides adapters for use in lighting fixtures.

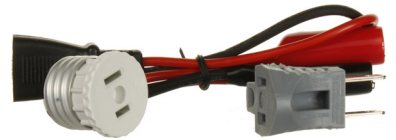

**TL-532A**  
Test Lead & Adapter Kit (sold separately)

THE ELECTRICIAN'S  
**CHAMPION**™



# CIRCUIT BREAKER FINDERS



| CIRCUIT BREAKER FINDER SELECTION GUIDE                        |                             |                             |
|---|-----------------------------|-----------------------------|
| TRANSMITTER FEATURES  | 61-534                      | 61-532                      |
| CAT Rating (Safety)   | CAT II 300V                 | CAT II 300V                 |
| Listing   | UL 1436                     | UL 1436                     |
| Line Voltage  | Line Powered (120V AC only) | Line Powered (120V AC only) |
| Supply Frequency  | 47-63Hz                     | 47-63Hz                     |
| Weight  | 50g (approx.)               | 50g (approx.)               |
| Pulse Amplitude   | 18A (approx.) @ 120V        | 18A (approx.) @ 120V        |
| Pulse Rate  | 4mS every 17ms (@ 60Hz)     | 4mS every 17ms (@ 60Hz)     |
| Power Consumption   | 200mW max. @ 120V AC        | 200mW max. @ 120V           |
| Operating Temperature   | 32° - 122°F (0 to 50°C)     | 32° - 122°F (0 to 50°C)     |
| GFCI  | ✓                           | —                           |
| Polarity Indication   | ✓                           | —                           |
| RECEIVER FEATURES   |                             |                             |
| Visual and Audible Indicators                                 | ✓                           | ✓                           |
| Low Battery Indication  | ✓                           | ✓                           |
| Auto Power Off (after 10 mins. of no activity)                | ✓                           | ✓                           |
| Battery Type  | 9V                          | 9V                          |
| Weight  | 0.2 lbs. (w/o battery)      | 0.2 lbs. (w/o battery)      |
| Warranty  | 2-Year*                     | 2-Year*                     |
| ACCESSORIES   |                             |                             |
| Light Socket and 3-prong to 2-prong Adapters, Alligator Clips | TL-532A                     | TL-532A                     |

P-6050 (5-21)  
©2021 IDEAL INDUSTRIES, INC.

Specifications are subject to change without notice.

**IDEAL CUSTOMER SERVICE:**  
orderdesk@idealindustries.com  
**1-800-824-3325**  
www.idealind.com

THE ELECTRICIAN'S  
**CHAMPION™**

