

# 120V AC CIRCUIT BREAKER FINDER

W/FLASHLIGHT, NCVT & GFCI RECEPTACLE TESTER

- cULus Certified (UL 1436, CSA C22.2 No. 160), CAT II 150V
- Quickly and easily identifies circuit breakers/fuses without disrupting power on energized 120V AC circuits
- Clear Visual and Audible indicators (Audible can be muted)
- NCVT in receiver tip indicates presence of AC voltage between 80-300V AC
- Flashlight in receiver operates independently of the tester functions and can be used to illuminate work area
- Transmitter tests outlet wiring configurations (indicated via Green/Red LEDs) and tests GFCIs
- Receiver powers off automatically after 5 minutes of non-use to conserve battery life



**Narrower Tip**  
improves breaker identification accuracy

**LED Flashlight**  
operates independently and illuminates work area

**Transmitter**  
sends a signal over the conductors when connected to an energized circuit. It also identifies the presence of power and indicates correct/incorrect wiring conditions via illuminated Green and Red LED's. A GFCI test light illuminates when the GFCI Test button is pressed, indicating the activation of the GFCI test. The GFCIs will trip if they are functioning properly



NOTE: Receptacle MUST be properly grounded for the GFCI test to work properly.

NOTE: The transmitter works on LIVE/Energized circuits only



**Receiver**  
powers off automatically after five minutes of non-use to conserve battery life

**Lanyard Mount**

**NCVT**  
in receiver tip indicates presence of AC voltage between 80-300V AC (visual flashing red LEDs & audible indicators)



**Receiver**  
reads the transmitter's signal and identifies the breaker/finder energizing the circuit by illuminating a flashing green LED and emitting beeps once it determines the breaker/fuse with the strongest signal.




**LED Flashlight**

**Audible Defeat**  
for noise sensitive areas

**On/Off** toggles between circuit breaker finding and NCVT functions (default circuit breaker finding)

**61-535**  
120V AC Circuit Breaker Finder w/Flashlight, NCVT & GFCI  
CAT II 150V | cULus Listed

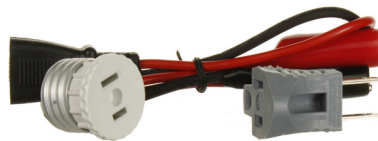

**TL-532A**  
Test Lead & Adapter KIT (sold separately)



**SCAN**  
to learn more

# 120V AC CIRCUIT BREAKER FINDER

W/FLASHLIGHT, NCVT & GFCI RECEPTACLE TESTER

**NEW**



**SCAN**  
to learn more



**61-535**  
Receiver

**61-535**  
Transmitter



**REPLACED BY THE ENHANCED AND ERGONOMIC 61-535**

**CIRCUIT BREAKER FINDER SELECTION GUIDE**



	<b>61-535</b>	<b>61-534</b>	<b>61-532</b>
<b>TRANSMITTER FEATURES</b>			
CAT Rating (Safety)	CAT II 150V	CAT II 300V	CAT II 300V
Listing	UL 1436, CSA C22.2 No. 160	UL 1436, CSA C22.2 No. 160	UL 1436, CSA C22.2 No. 160
Line Voltage	Line Powered (120V AC)	Line Powered (120V AC)	Line Powered (120V AC)
Supply Frequency	60Hz	47-63Hz	47-63Hz
Weight	28.35g (approx.)	50g (approx.)	50g (approx.)
Flashlight	✓	—	—
NCVT	✓	—	—
Power Consumption	1.5W max. @ 120V AC	200mW max. @ 120V AC	200mW max. @ 120V AC
Correct/Wiring Fault/Polarity Indications	✓	✓	—
GFCI Trip/Test	✓	✓	—
GFCI Trip Test Indicator	✓	—	—
<b>RECEIVER FEATURES</b>			
Visual and Audible Indicators	✓	✓	✓
Low Battery Indication	✓	✓	✓
Auto Power Off (after no activity)	(after 5 mins.)	(after 10 mins.)	(after 10 mins.)
Battery Type	9V	9V	9V
Weight	85g (w/o battery)	85g (w/o battery)	85g (w/o battery)
Warranty	2-Year*	2-Year*	2-Year*
<b>ACCESSORIES</b>			
Light Socket and 3-prong to 2-prong Adapters, Alligator Clips	<b>TL-532A</b>	<b>TL-532A</b>	<b>TL-532A</b>

\* Visit [www.idealind.com](http://www.idealind.com) for warranty details.

Specifications are subject to change without notice.



**IDEAL INDUSTRIES, INC.**  
1800 S. Prairie Drive, Sycamore, IL 60178, USA / 815-895-5181 • 800-435-0705 in USA

International offices:  
Australia • Canada • China • India • Mexico • UK

For complete sales office contact information, visit us at:  
[www.idealind.com](http://www.idealind.com)