




**B-Twist™  
WIRE CONNECTOR**

**MODEL  
BT2**

**FEATURES/BENEFITS:**



- CONNECTION COMES TO TORQUE QUICKLY TO GET THE JOB DONE EFFECIENTLY
- ROUNDED DIAL-TOP PROVIDES FAST, FINGERTIP START
- LONG, SWEEP WINGS OFFER HIGH TORQUE IN A LOW-PROFILE DESIGN
- WIDE, EXPANDING SPRING MAKES FOR EASY STARTS ON EVEN THE LARGEST COMBINATIONS
- WIDE RANGE COVERS FROM 2 #18 TO 2 #8

**ELECTRICAL:**

VOLTAGE:  
GENERAL: 600 V MAX  
SIGN/LUMINAIRES: 1000 V MAX

**PHYSICAL:**

HOUSING: GRAY THERMOPLASTIC POLYESTER  
INSERT: STEEL  
PLATING: ZINC  
TEMPERATURE: 105° C (221° F)

**STANDARDS & SPECIFICATIONS:**

UL 486 C  
UL 94V-2 FLAME RATING  
CSA- C22.2 NO. 188  
RoHS COMPLIANT  
IEC 998-2-4

Made in U.S.A.



**WIRE RANGE & COMBINATIONS:**


- Solid and/or stranded wire combinations unless stated otherwise
- Consult website for other combinations not listed

BT2 (RED)

STRIP LENGTH: 1/2"

- 4 to 6 #22
- 3 to 6 #20
- 2 to 6 #18
- 1 to 6 #16
- 1 to 6 #14
- 1 to 5 #12
- 1 to 4 #10
- 2 #10 w/ 2 #12 w/ 1 #14
- 3 #12 w/ 2 #14 w/ 1 #16
- 5 #20 w/ 1 #22

**DIMENSIONS:**

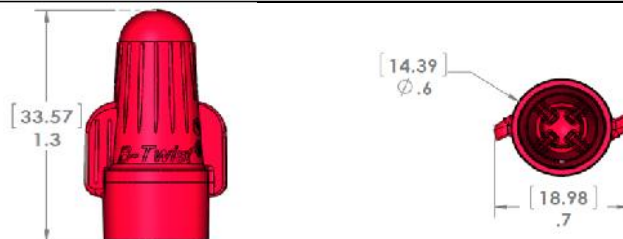

**ORDERING INFO:**

MODEL	COLOR	QUANTITY	CAT. NO.	WEIGHT (lbs)
BT2	RED	BOX OF 100	<b>BT2-1</b>	0.69
		JAR OF 500	<b>BT2-500JR</b>	3.75
		BARREL OF 25,000	<b>BT2-SK</b>	167.50

**FACTORY CONTACT:**

IDEAL INDUSTRIES, INC.  
1375 PARK AVENUE, SYCAMORE, IL, 60178

P: (800) 324-9571  
F: (888) 222-6140  
E: oem@idealindustries.com

**SALES CONTACT:**